


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61M 29/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 96/12517</b>
			(43) International Publication Date: 2 May 1996 (02.05.96)
(21) International Application Number: PCT/US95/13249			(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).
(22) International Filing Date: 19 October 1995 (19.10.95)			
(30) Priority Data: 08/326,023 19 October 1994 (19.10.94) US 08/478,192 7 June 1995 (07.06.95) US			
(71) Applicant: APPLIED VASCULAR ENGINEERING, INC. [US/US]; 3621 Westwind Boulevard, Santa Rosa, CA 95403 (US).			
(72) Inventors: JENDERSEE, Bradley; 1848 Castle Drive, Petaluma, CA 94954 (US). LASHINSKI, Robert; 409 Princess Way, Windsor, CA 95492 (US). BONEAU, Michael, D.; 993-6 Asilomar Terrace, Sunnyvale, CA 94086 (US).			
(74) Agents: MULLOWNEY, Edward, F. et al.; Fish & Neave, 1251 Avenue of the Americas, New York, NY 10020 (US).			
Published With international search report.			

(54) Title: STENT DELIVERY AND DEPLOYMENT METHOD

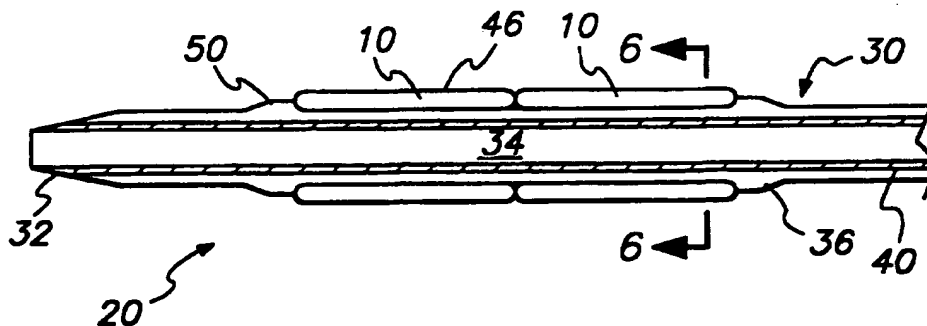

## (57) Abstract

An encapsulated stent device for implantation within the vascular system includes a balloon (36) of a balloon catheter (30) formed around and adhered to a wire-like stent (10) so that the outer surface of the device is more regular for delivery through the vascular system without an exterior sheath. The encapsulation securely anchors the stent (10) to the balloon (36) and maintains a low profile for negotiation of tortuous and narrowed vessels. Encapsulation requires placement of the stent (10) over the balloon (36), placement of a sheath (42) over the stent (10) on the balloon (36), heating and preferably pressurization of the balloon (36) to cause it to expand around the stent (10) within the sheath (42), and cooling while preferably maintaining pressure to cause the balloon (36) to adhere to the stent (10) and to set the shape of the expanded balloon (10). Retainers may be placed at the distal and/or proximal ends of the stent during the encapsulation process, or the balloon material may expand to form retainers (54). The balloon (36) defines at least three folded wings for symmetrical expansion of the stent (10), and one or more connected or non-connected stents may be encapsulated depending upon the area to be treated.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

**STENT DELIVERY AND DEPLOYMENT METHOD****Field of the Invention**

This invention relates to medical implant devices. More specifically, the invention relates to a stent  
5 encapsulated by an expandable balloon for delivery and deployment in narrowing coronary or peripheral vessels in humans.

**Description of the Prior Art**

Cardiovascular disease, including atherosclerosis,  
10 is the leading cause of death in the U.S. The medical community has developed a number of methods and devices for treating coronary heart disease, some of which are specifically designed to treat the complications resulting from atherosclerosis and other forms of  
15 coronary arterial narrowing.

An important development for treating atherosclerosis and other forms of coronary narrowing is percutaneous transluminal coronary angioplasty, hereinafter referred to as "angioplasty" or "PTCA".  
20 The objective in angioplasty is to enlarge the lumen of the affected coronary artery by radial hydraulic expansion. The procedure is accomplished by inflating a balloon within the narrowed lumen of the coronary artery. Radial expansion of the coronary artery occurs  
25 in several different dimensions, and is related to the nature of the plaque. Soft, fatty plaque deposits are flattened by the balloon, while hardened deposits are cracked and split to enlarge the lumen. The wall of the artery itself is also stretched when the balloon is  
30 inflated.

Angioplasty is typically performed as follows: A thin walled hollow guiding catheter is introduced into the body via a relatively large vessel, such as the femoral artery in the groin area or the brachial artery  
35 in the arm. Once access to the femoral artery is achieved, a short hollow sheath, or guiding catheter,

- 2 -

is inserted to maintain a passageway during the procedure. The flexible guiding catheter must negotiate an approximately 180 degree turn through the aortic arch to descend into the aortic cusp where entry  
5 may be gained to either the left or the right coronary artery, as desired.

After the guiding catheter is advanced to the area to be treated by angioplasty, a flexible guidewire is inserted into the guiding catheter through an  
10 expandable balloon (described infra) and advanced to the area to be treated. The guidewire is advanced across the lesion, or "wires" the lesion, in preparation for the advancement of a balloon catheter having an expandable balloon portion composed of  
15 polyethylene, polyvinyl chloride, polyolefin, or other suitable substance, across the guide wire. Currently, most balloons utilize two folded wings wrapped around the hollow catheter tube. The balloon catheter is placed into position by sliding it along the guide  
20 wire. The use of the relatively rigid guide wire is necessary for steerability to advance the catheter through the narrowed lumen of the artery and to direct the balloon, which is typically quite flexible, across the lesion. Radiopaque markers in the balloon segment  
25 of the catheter facilitate positioning across the lesion. The balloon catheter is then inflated with contrast material to permit fluoroscopic viewing during treatment. The balloon is alternatively inflated and deflated until the lumen of the artery is  
30 satisfactorily enlarged.

Unfortunately, while the affected artery generally can be enlarged, in some instances the vessel restenoses chronically, or closes down acutely, negating the positive effect of the angioplasty  
35 procedure. In the past, such restenosis has frequently necessitated repeat PTCA or open heart surgery. While

- 3 -

such restenosis does not occur in the majority of cases, it occurs frequently enough that such complications comprise a significant percentage of the overall failures of the PTCA procedure, for example,  
5 twenty-five to thirty-five percent of such failures.

To lessen the risk of restenosis, various devices have been proposed for mechanically keeping the affected vessel open after completion of the angioplasty procedure. Such mechanical endoprosthetic  
10 devices, which are generally referred to as stents, are typically inserted into the vessel, positioned across the lesion, and then expanded to keep the passageway clear. Effectively, the stent overcomes the natural  
15 tendency of the vessel walls of some patients to close back down, thereby maintaining a more normal flow of blood through that vessel than would be possible if the stent were not in place.

Various types of stents have been proposed, including self-expandable and expandable stents,  
20 although to date none has proven completely satisfactory. Expandable stents generally are conveyed to the area to be treated on balloon catheters or other expandable devices. For insertion, the stent is  
25 positioned in a compressed configuration along the delivery device, such as a balloon catheter defining a balloon with two folded and wrapped wings, to make the stent diameter as small as possible. After the stent  
30 is positioned across the lesion, it is expanded by the delivery device, causing the length of the stent to contract and the diameter to expand. Depending on the materials used in construction of the stent, the stent maintains the new shape either through mechanical force or otherwise.

One such expandable stent for delivery on a  
35 balloon catheter is the Palmaz stent (U.S. Patent No. 4,733,665) which may be thought of as a stainless steel

- 4 -

cylinder having a number of slits in its circumference, resulting in a mesh when expanded. The stainless steel cylinder is compressed onto the outside of a non-expanded balloon catheter which includes stent retainer  
5 rings at each end of the stent to help to maintain the stent on the balloon. Also, it is advisable to place a sheath over the compressed stent and balloon assembly to retain the stent on the balloon and to create an even outer surface on the assembly for negotiation  
10 through the narrowed vessels. Boneau U.S. Patent No. 5,292,331 provides a unitary wire-like stent structure configured to form a plurality of upper and lower axial peaks, and is delivered and expanded in a similar manner.

15 Significant difficulties have been encountered with deployment of known prior art stents, including difficulty in maintaining the stent on the balloon and in achieving symmetrical expansion of the stent when deployed. Currently, some stent delivery systems  
20 retain the stent on the delivery catheter by means of either (a) plastically deforming the stent so that it is crimped onto the balloon, or (b) having the stent exhibit a small enough internal diameter to act as an interference fit with the outside diameter of the  
25 balloon catheter. The disadvantage with these methods is that the limited amount of securement between the stent and the balloon is not always adequate to insure the stent will properly stay in place while advancing the stent to and through the target lesion.  
30 Additionally, the outer surface of the delivery device is uneven because the stent generally extends outwardly beyond the balloon and may contact a narrowed vessel wall and be displaced while the catheter negotiates a narrowed vessel. Most known expandable stent delivery  
35 systems utilize a removable sheath system on the outside of the stent, with or without retainer rings,

- 5 -

that is removed once the stent is at the delivery site. This method protects the stent and provides a smooth surface for easier passage through vessels, but the method increases the crossing profile of the delivery  
5 device thereby decreasing the device's ability to track through narrowed and torturous vasculature. This and other complication have resulted in a low level of acceptance for such stents within the medical community, and to date stents have not been accepted as  
10 a practical method for treating chronic restenosis.

A long felt need exists for a delivery and deployment method for stents which ensures positional stability of the stent during delivery without the need for an external sheath, thereby substantially  
15 decreasing the cross sectional profile of the balloon delivery device, and ensures symmetrical expansion of the stent at deployment.

#### Summary of the Invention with Objects

The stent delivery and deployment method of this  
20 invention provides a frozen-in balloon in intimate contact with, and/or surrounding, a stent to assure stent attachment to the balloon, i.e. encapsulation. This method is especially valuable at the proximal and distal ends of the stent for delivery purposes because  
25 a smoother transition occurs between the distal and proximal surfaces of the balloon catheter and the distal and proximal ends of the stent, and it also is effective along substantially the entire length of the stent. The frozen-in balloon form is achieved by  
30 encapsulating the stent so that the balloon may expand part way around the stent and adhere thereto. The preferred method of encapsulating the stent and balloon includes the steps of compressing the stent on the outside of the balloon, placing a sheath over the  
35 compressed stent to prevent expansion, and exposing the sheathed stent and balloon to an elevated temperature

- 6 -

while pressurizing the balloon. The elevated temperature and pressurization causes the balloon to expand from below the stent to fill at least some of the spaces between the stent and the sheath. Following expansion and exposure to an elevated temperature, the balloon and stent are cooled while maintaining pressure in the balloon, so that the balloon profile will be "frozen around" (formed and somewhat adhered to) the stent. Alternatively, heat without pressurization of the balloon may be sufficient for encapsulation when the compressive forces of the sheath against the stent, which is pressed against the heated balloon, enables encapsulation of the stent.

If desired, the encapsulated stent may include conventional retainers at the proximal and/or distal end of the balloon. Such retainers may be located on top of the balloon or within the balloon. Additionally, the balloon itself may be used to form one or more stent retainers during encapsulation. In this aspect of the invention, a space is defined between the balloon and the sheath, proximal and/or distal to the stent, so that the balloon expands to occupy the space and form one or more retainers during the encapsulation process. Retainers assist in delivery by providing a smooth transition between the encapsulated stent and the catheter surface.

The preferred balloon for the method described above defines multiple (three or more) folded and wrapped "wings" or radial extensions on a balloon delivery device to assure radially symmetrical stent expansion during deployment. The preferred balloon utilizes four wings for a Boneau stent having four axial turns at each end, and the balloon length and number of wings may be tailored to the particular stent or stents to be deployed. By utilizing more than two wings, more symmetrical stent deployment and vessel



- 7 -

coverage can be achieved. Symmetrical stent deployment results in symmetrical expansion and support of the target lesion thereby suggesting use of multiple folds for standard PTCA balloon catheters with or without  
5 stents.

The method of this invention may be used with most self-expanding and expandable prior art stents, such as tubular slotted stents, and including connected stents, articulated stents, and multiple connected or non-  
10 connected stents. It is preferred to use a stent apparatus such as the Boneau stent which is formed preferably from a single piece of wire defining axial bends or turns between straight segments. The stent apparatus can then be encapsulated on a balloon  
15 catheter using the inventive method, delivered to the affected vessel and expanded in place, all as described herein. Some of the intended uses include PTCA type stenting, PTA type stenting, graft support, graft delivery, INR use, GI tract use, drug delivery, and  
20 biliari stenting.

A general object of the present invention is to provide a stent delivery and deployment method that overcomes the drawbacks and limitations of the prior art.

25 A specific object of the present invention is to provide a stent delivery and deployment method that eliminates the need for a deployment sheath and results in a low profile device with a more regular outer surface that may be delivered through tortuous,  
30 narrowed vessel.

Another specific object of the present invention is to provide a stent delivery and deployment method which encapsulates the balloon and stent thereby securing the stent to the balloon and decreasing the  
35 profile of the stent and balloon.

- 8 -

Yet another specific object of the present invention is to provide a stent delivery and deployment method which includes a balloon with three or more wrapped and folded wings to ensure symmetrical  
5 deployment of the stent and expansion of the lesion to be treated.

One more specific object of the present invention is to provide an encapsulated stent and balloon have a retainer at the distal and/or proximal ends of the  
10 stent for maintaining the stent on the balloon and for forming a smooth outer surface on the encapsulated stent device.

Still another specific object of the invention is to provide a method for encapsulating the majority of  
15 expandable and self-expanding stents for treating vessels in humans.

These and other objects, advantages and features of the present invention will become more apparent upon considering the following detailed description of  
20 preferred embodiments, presented in conjunction with the accompanying drawings.

#### Brief Description of the Drawings

Fig. 1 is a longitudinal cross sectional view of two encapsulated stents and a balloon embodying the  
25 principles of the present invention and shown on a balloon catheter device.

Fig. 2 is a longitudinal cross sectional view of the stents of Fig. 1 compressed upon a balloon of a balloon catheter and shown prior to the encapsulation  
30 process.

Fig. 3 is a longitudinal cross sectional view of the stents and balloon during the encapsulation process and shown positioned within interior and exterior sheaths.

- 9 -

Fig. 4 is a cross sectional view taken along lines 4-4 of Fig. 2 and showing four folded and wrapped wings of the balloon beneath one of the stents.

Fig. 5 is a cross sectional view showing the partially inflated form of the balloon around the stent.

Fig. 6 is a cross sectional view taken along lines 6-6 of Fig. 1 and showing the frozen-in form of the balloon around the stent.

Fig. 7 is a longitudinal cross sectional view of two encapsulated stents and a balloon showing retainers on the outside of the balloon.

Fig. 8 is a longitudinal cross sectional view of encapsulated stents and a balloon showing retainers on the inside of the balloon and attached to the balloon catheter.

#### Detailed Description of Preferred Embodiments

Fig. 1 shows an encapsulated stent assembly 20 embodying the principles of the present invention. Two stent segments 10 are shown, and it will be recognized by those skilled in the art that one or more stent segments 10 may be used depending upon the size and configuration of the narrowed vessel to be treated. Additionally, when more than one stent segment 10 is used, the segments may be connected together by articulated or rigid joints, or multiple single stent segments may be deployed on the balloon catheter 30.

The balloon catheter 30 preferably is of low profile design defining a tapered distal tip 32, and an inner lumen 34 for insertion of a conventional guide wire (not shown). Any conventional or modified balloon catheter device may be used, such as a PTCA balloon catheter, and it is preferred that the expandable balloon portion 36 be configured on the catheter 30 so that the collapsed balloon defines three or more folded wings 38 which are wrapped around the outside of the

- 10 -

catheter tube 40 as best shown in Fig. 4. In the embodiment in Fig. 4, the balloon 36 defines four folds 38 wrapped around the catheter tube 40 in a clockwise direction.

- 5       The preferred balloon 36 is formed from a material such as polyethylene, polyethylene terephthalate (PET), or from nylon or the like. The length and diameter of the balloon may be selected to accommodate the particular configuration of the stent to be
- 10   encapsulate. The balloon may be carried on any catheter, although PCTA low profile catheters and over the wire catheters are preferred. The wings of the balloon are formed by pulling the balloon catheter through a forming tool having a generally cylindrical
- 15   cross section and defining a terminal opening configured to produce the desired number of wings in the balloon. For instance, configuration of the terminal opening may include three or four slits radiating outwardly from the end of the forming tool,
- 20   depending upon the number of folds to be produced. As the balloon catheter is pulled through the forming tool, the balloon is pushed through the configured terminal opening and exits having, for instance, three separate flutes. The balloon catheter bearing the
- 25   fluted balloon portion then is pulled into a sheath, preferably a two part sheath made of Teflon or other suitable materials, so that the flutes fold and wrap around the catheter in a clockwise direction to form a generally spiral configuration around the catheter.
- 30   The sheath-balloon catheter assembly is subjected to heat, preferably by placing the assembly in a heat set oven, to form a crease in substantially the length of each of the folded flutes. The sheath also may be of unitary construction. Following heat setting, the
- 35   balloon 36 retains the creases formed in the wings and

- 11 -

defines a generally symmetrical, cylindrical cross section, as best seen in Fig. 4.

Referring now to Figs. 1-5, the Boneau stent is shown for illustration purposes only, and Boneau U.S. Pat. No. 5,292,331 is hereby incorporated by reference. Each of the stent segments 10 is preferably a short, single wire stent 10 having an expandable, generally cylindrical body portion defining an inside surface and an outside surface. In the stent segments 10 shown, the single piece of wire is bent to form a plurality of upper and lower axial turns 2. The plurality of upper turns 2 are connected to the plurality of lower turns 2 by substantially straight sections 4. The axial turns 2 can be seen to permit the stent segment 10 to be compressed or expanded over a wide range while still maintaining a significant mechanical force, such as required to prevent a vessel from restenosis or recoiling.

The stent segments 10 are preferably constructed of implantable materials having good mechanical strength, such as implantable quality stainless wire. The outside of the stent segments may be selectively plated with platinum, or other implantable radiopaque substances, to provide improved visibility during fluoroscopy. The cross-sectional shape of the finished stent segment 10 may be circular, ellipsoidal, rectangular, hexagonal, square, or other polygon, although at present it is believed that circular or ellipsoidal may be preferable.

The minimum length of each stent segment 10, or the distance between the upper turns and lower turns 2, is determined in large measure by the size of the vessel into which the stent 20 will be implanted. Additionally, each stent segment 10 may define N number of turns, N being preferable between 2 and 10. In the stent segments 10 shown in the drawings, the segments

- 12 -

define four upper and four lower axial turns 2. The stent segments 10 may be connected together by articulated or rigid joints, or they may be deployed in a multiple spaced apart, non-connected configuration.

5 The implanted encapsulated stent assembly 20 will preferably be of sufficient length as to maintain its axial orientation with the vessel without shifting under the hydraulics of blood flow (or other fluid flow in different types of vessels), while also being long  
10 enough to extend across at least a significant portion of the affected area. At the same time, the encapsulated stent 20 should be short enough as to not introduce unnecessarily large amounts of material as might cause undue thrombosis.

15 Following selection of the configuration and size of a stent segment 10, or multiple connected or non-connected stent segments, the segment or segments 10 are compressed upon the outside of the balloon 36 of the balloon catheter 30 as best shown in Figs. 2 and 4.

20 An interior sheath 42 is placed over each end of the balloon catheter 30, and an exterior sheath 44 is placed over the interior sheath 42 to cover the stent segments 10 and overlap with the interior sheath 42. The sheaths 42, 44 are preferably non-expandable, and  
25 of a size to accept insertion of the stent segments 10 mounted on the balloon. Sheaths 42, 44 are shown for example only, and it will be recognized by those skilled in the art that the balloon catheter and stents compressed thereon also may be placed within a mold to  
30 prevent expansion of the stent and configured to allow expansion of the balloon as desired.

Next, the balloon catheter 30 preferably is pressurized by introducing air, or an inert gas such as nitrogen, through the lumen 34 into the interior of the  
35 balloon to partially expand the balloon 36 within the sheaths 42, 44. The assembly then is exposed to an

- 13 -

elevated temperature while maintaining pressurization of the balloon. The pressure may be, for example, approximately 70 psi, and the elevated temperature may be achieved by placing the sheathed assembly into an  
5 oven at approximately 150 degrees Fahrenheit to accomplish the heating step.

Figs. 4-6 demonstrate, respectively, the configuration of the balloon 36 prior to pressurization, the configuration during inflation, and  
10 the frozen-in form configuration around and adhering to a stent segment 10. The balloon 36, and the wings 38, expand partially outwardly to occupy spaces around the axial turns 2 and between the straight sections 4 so that the balloon 36 and the stent segments 10 are in  
15 intimate contact. Those skilled in the art will recognize that expansion of the balloon also depends upon the form of the particular stent selected for encapsulation. Pressure between the stent and the balloon during heating and balloon pressurization  
20 causes an adherence upon cooling. Adherence is required for encapsulation which includes both intimate contact between the stent and the balloon as well as contact where the balloon surrounds at least a portion of the stent.

25 Alternatively, pressurization of the balloon during the heating step is not required where the sheaths 42, 44 fit tightly around the stent-balloon assembly. Pressure radiating inwardly from the sheaths 42, 44 to press against the stents 10 causes the stents  
30 10 to press against the heated balloon to achieve encapsulation.

Following heating, the balloon-stent assembly is removed from the heat and allowed to cool within the sheath. In those cases where the balloon has been  
35 pressurized during heating, the internal pressure is maintained. Cooling sets the shape of the balloon 36

- 14 -

which adheres to the stent 10 following cooling, thereby allowing removal of the sheaths 42, 44 for delivery of the assembly 20 within a vessel. Because of the adherence between the stent segment 10 and the  
5 balloon 36 of the encapsulated stent assembly 20 and the more regular surface area created by encapsulating stent assembly segments, the encapsulated stent assembly 20 may be delivered without an external sheath.

10 As best shown in Fig. 3, and in Fig. 1, the encapsulated stent assembly 20 may include a distal retainer 50 and/or a proximal retainer 52. The retainers 50, 52 further secure the stent segment 10 to the balloon 36 and create a smooth transition between  
15 the balloon/stent area of the delivery device and the distal and proximal surface of the delivery device of the encapsulated stent assembly 20. The retainers 50, 52 may be formed by the balloon itself during the encapsulation process, with the configuration of the  
20 formed retainers 50, 52 determined by the dimensions of the spaces between the inner sheath 42 and the stent segments 10. Formed retainers 50, 52 may be tapered or no-tapered. Alternatively, conventional retainers 54 may be attached over the balloon 36 prior to  
25 encapsulation, as shown in Fig. 7, or the retainers 54 may be placed within the balloon 36, as shown in Fig. 8. One or two retainers 54 may be used, and conventional retainers may be made from any implantable material, such as implantable stainless steel or  
30 polymers. Depending upon the configuration of the encapsulated stent assembly 20, retainers generally range in length from 0-20 mm.

The encapsulated stent assembly 20 is delivered to the desired site with or without a guiding catheter and  
35 using a conventional guidewire for steerability to negotiate the area to be treated. Conventional



- 15 -

radiopaque markers and fluoroscopy may be used with the device for positioning the encapsulated stent assembly and for viewing the expansion procedure. Once the encapsulated stent assembly is in place across the  
5 lesion, the balloon may be inflated in a conventional manner. In the embodiment shown in Figs. 4-6, the four wings 38 expand evenly to form four, symmetrical expanded flutes which symmetrically expand the inner diameter of the encapsulated stent outwardly by  
10 increasing the angle at the axial bends. During typical balloon expansion pressures of approximately 6 atmospheres or 90 psi, occurring within the human body and at body temperature, the heat set creases dissipate. The folded and wrapped wing configuration  
15 of the balloon ensures that the balloon will provide radially uniform inflation so that the stent will expand substantially equally along each of the peaks. Uniform expansion of the lumen of the vessel occurs with uniform, symmetrical expansion of the encapsulated  
20 stent and balloon. The amount of inflation, and commensurate amount of expansion of the stent, may be varied as dictated by the lesion itself, making the stent assembly of the present invention particularly flexible in the treatment of chronic restenosis and  
25 abrupt reclosure.

Because of the inflation of the balloon and expansion of the arterial wall of the vessel, the arterial wall bulges radially. At the same time, the plaque deposited within the intima of the vessel is  
30 displaced and thinned, and the stent is embedded in the plaque or other fibrotic material adhering to the intima of the vessel.

Following inflation of the balloon and expansion of the encapsulated stent within the vessel, the  
35 balloon is deflated so that it pulls away from the stent for removal. The deflated balloon generally

- 16 -

forms from 1 1/2 to 2 3/4 wings, including a generally U-shaped deflated form, and the deflated wings do not retain the creases by the heat setting balloon formation process discussed above. The deflated  
5 balloon easily folds around the balloon catheter for removal.

The exterior wall of the vessel attempts to return to its original shape through elastic recoil. The stent, however, remains in its expanded form within the  
10 vessel, and prevents further recoil and restenosis of the vessel. The stent maintains an open passageway through the vessel. Because of the low mass of the preferred support device of the present invention, thrombosis is less likely to occur. Ideally, the  
15 displacement of the plaque deposits and the implantation of the stent will result in a relatively smooth inside diameter of the vessel.

While the primary application for the stent is presently believed to be treatment of cardiovascular  
20 disease such as atherosclerosis or other forms of coronary narrowing, the stent of the present invention may also be used for treatment of vessels in the kidney, leg, carotid, or elsewhere in the body. In such other vessels, the size of the stent may need to  
25 be adjusted to compensate for the differing sizes of the vessel to be treated.

While this invention has been described in connection with preferred embodiments thereof, it is obvious that modifications and the changes therein may  
30 be made by those skilled in the art to which it pertains without departing from the spirit and scope of the invention. For instance, the encapsulation method and deployment is not limited to any particular expandable stent device. Accordingly, the aspects  
35 discussed herein are for illustration only and should not limit the scope of the invention herein which is

WO 96/12517

- 17 -

defined by the c  
claims.

- 18 -

What is claimed is:

1. A stent delivery system comprising a stent mounted on a balloon catheter;  
wherein the balloon catheter comprises a catheter  
5 body and an inflatable balloon positioned upon said catheter body and an inflation lumen defined within said catheter body for selectively inflating and deflating said balloon;  
wherein said stent is a generally tubular device  
10 having a first diameter for intraluminal delivery and wherein said stent is adapted to be expanded to a second diameter for deployment in a vessel;  
wherein said stent is mounted on said inflatable balloon of said balloon catheter;  
15 and wherein said stent is encapsulated by said balloon of said balloon catheter for implantation in a vessel within the human body.
2. The stent delivery system of Claim 1 wherein the balloon is adhered to the stent when encapsulated.
- 20 3. The stent delivery system of Claim 1 wherein said stent is crimped onto said balloon to have an interior diameter  $D_i$  and wherein portions of said balloon protrude to have a diameter greater than  $D_i$ .
4. The stent delivery system of Claim 1 further  
25 comprising at least one retainer means for facilitating delivery of the encapsulated stent for implantation.
5. The stent delivery system of Claim 1 wherein the stent means comprises at least one wire-like member in the form of a plurality of substantially straight, non-  
30 overlapping sections connected by axial bends.
6. The stent delivery system of Claim 1 wherein the balloon defines at least three wings surrounding the balloon catheter for substantially symmetrical expansion of the stent.

- 19 -

7. The stent delivery system of Claim 5 wherein the balloon defines a number of wings selected relative to a number of axial bends of the stent.

8. The stent delivery system of Claim 5 wherein the  
5 stent comprises at least two connected wire-like members.

9. A method of manufacture of a stent delivery system comprising the steps of:

mounting at least one stent on a balloon of a  
10 balloon catheter;

covering the mounted stent with a sheath adapted to prevent expansion of the mounted stent;

heating the mounted stent means within the holding means to cause the balloon to conform to the shape of  
15 the stent; and

cooling the balloon catheter within the holding means so that the balloon adheres to the stent means.

10. The method of Claim 9 further including the step of applying positive pressure to the interior of the  
20 balloon during the heating step.

11. The method of Claim 9 further including the step of applying positive pressure to the interior of the balloon during the heating and cooling steps.

12. The method of Claim 9 further including the step  
25 of removing the sheath after the cooling step.

13. The method of Claim 12 further including the step of removing the sheath after the cooling step.

14. The method of Claims 9 or 11 wherein the mounting step comprises the step of crimping the stent onto the  
30 balloon such that it has an interior diameter  $D_1$ ;

and wherein portions of the balloon expand to a diameter greater than  $D_1$  during the heating step and remain at a diameter greater than  $D_1$  after the cooling step.

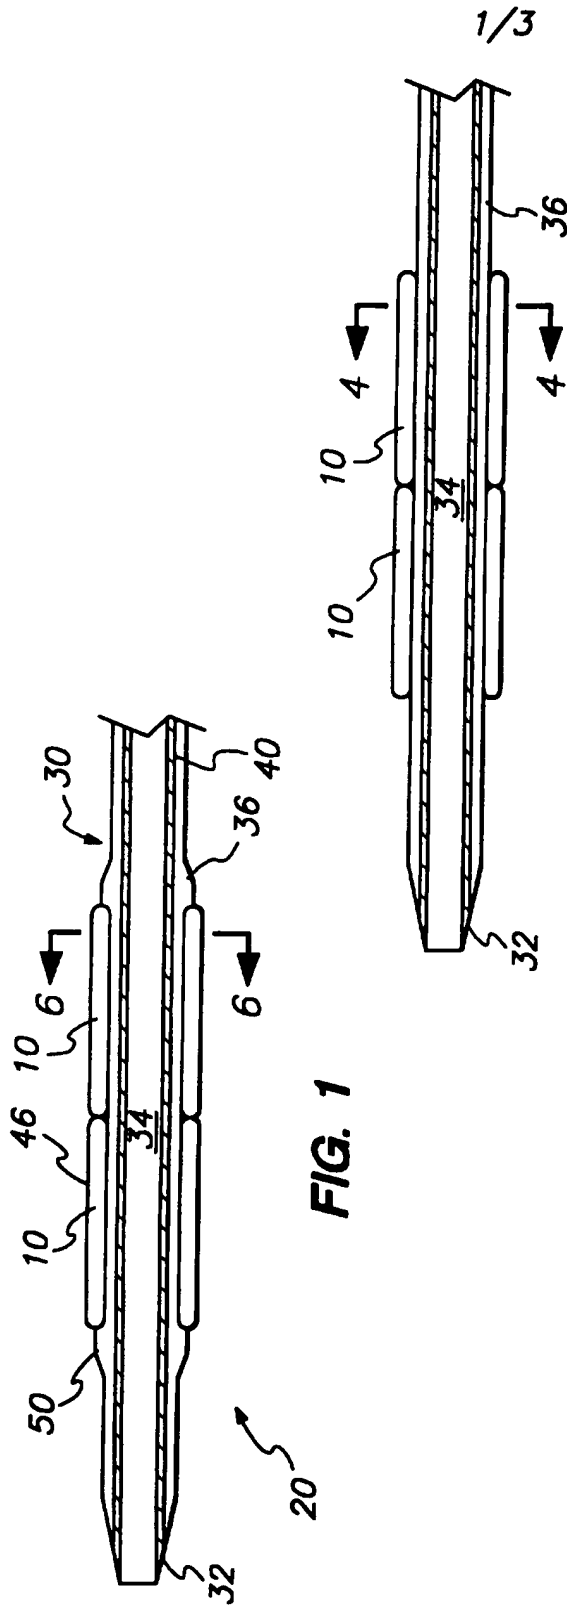


FIG. 2

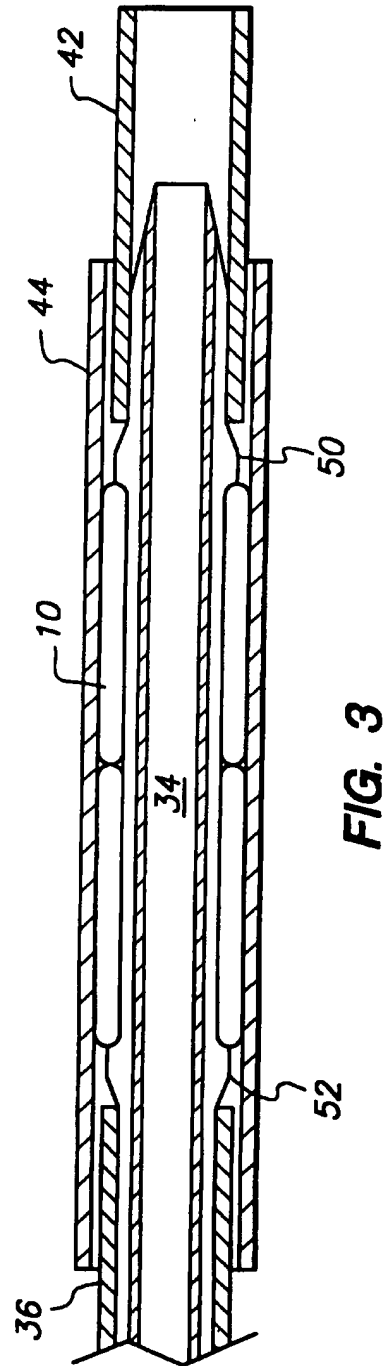
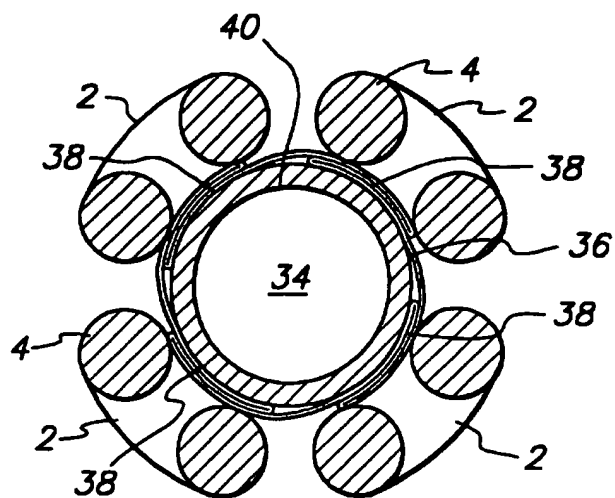
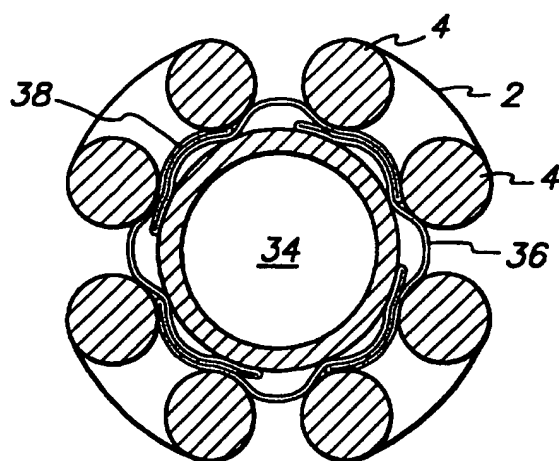


FIG. 3

2/3

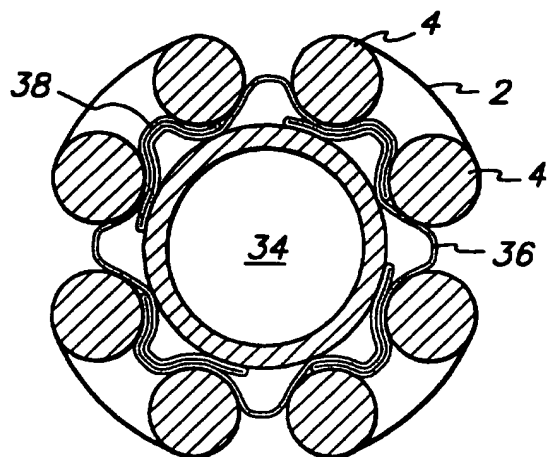


**FIG. 4**



**FIG. 5**

3/3



**FIG. 6**



**FIG. 7**



**FIG. 8**



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US95/13249

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :A61M 29/00

US CL :604/96; 606/192

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 604/96-104; 606/108, 191, 192, 194, 195, 198, 200; 623/1, 12

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
NONE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US, A, 5,242,399 (LAU ET AL.) 07 September 1993, see entire document.	1-8
Y	US, A, 5,158,548 (LAU ET AL.) 27 October 1992, see entire document.	1-8
A	US, A, 5,108,416 (RYAN ET AL.) 28 April 1992, see entire document.	1-8

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

06 JANUARY 1996

Date of mailing of the international search report

31 JAN 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Authorized officer

WILLIAM LEWIS

Facsimile No. (703) 305-3230

Telephone No. (703) 308-0060